


MELAWOOD
SUPAGLOSS

It's the MelaWood® SupaGloss™ Guide.


Design, manufacture, craft and care

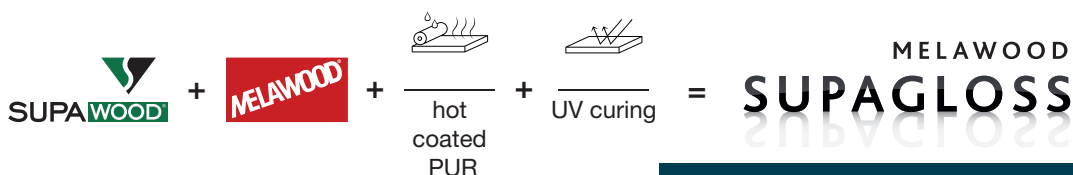

**MelaWood®
SupaGloss™**

DIN EN 13722
Gloss level > 101 GE (20°)

Applications



Hot coated polyurethane (PUR) gloss and ultraviolet (UV) light cured

Making use of state-of-the-art, patented technologies, MelaWood® SupaGloss™ gives you a high-end, desirable and hard-wearing gloss decorative finish.


Hot coated polyurethane (PUR) is applied to MelaWood® with a SupaWood® core and then cured using ultraviolet (UV) light, producing a durable, high gloss surface with good wear and scratch resistance.

This technology also gives MelaWood® SupaGloss™ its consistent stability and visual depth. You can work in confidence knowing your finished product will look superb.

Locally manufactured by PG Bison, to international standards, MelaWood® SupaGloss™ gives you

the assurance of a dependable, readily available product, consistent in colour and surface finish. You never have to worry about one batch of board not matching the next or the possibility of discolouration.

With matching décor in a PEEN finish on the reverse side, MelaWood® SupaGloss™ is supplied with a protective film to shield the gloss face during handling and processing, so your finished product can arrive on site looking as good as you intended.

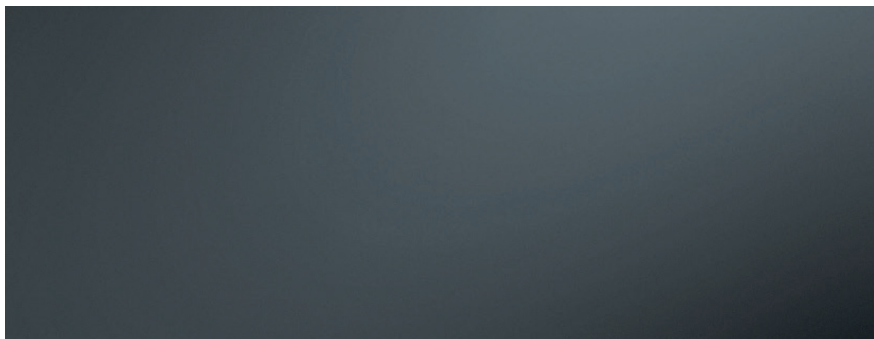

Gloss level
**> 101
GE (20°)**



**Locally
produced**

**Cost
effective
and
value for
money**

Advantages of MelaWood® SupaGloss™

- > Gloss level > 101 GE (20°)
- > Durable, UV hardened gloss surface
- > Superior machinability over conventional UV coatings
- > Made locally to international standards
- > Contemporary and stylish range
- > Consistency in quality and colour
- > Trusted MelaWood® décor on quality SupaWood® core
- > Available in 2750mm x 1830mm for better yield and less waste
- > Protective film shields gloss surface during handling and processing
- > Cost effective and value for money
- > Matched edging available locally




To ensure a clean, problem free removal, MelaWood® SupaGloss™'s protective film should be removed as soon as possible after processing and installation and 5 months, at the latest, after delivery.

MelaWood® SupaGloss™

MelaWood® SupaGloss™ sold in pack sizes only

Thickness	Pack size	Sheet sizes and tonnage
16mm	5	0.33 tons
16mm	20	1.31 tons

MELAWOOD
SUPAGLOSS



As products, tools, machine technologies, processes and value add activities continuously develop, please always refer back to our website for changes and updated product guidelines at:

<https://www.pgbison.co.za>

Subject to our standard terms and conditions of sale, PG Bison warrants only the performance properties of our products as set out in our technical data sheets.

Please run detailed trials and tests to verify how your established procedure is affected before using any product contained herein in normal production.

DISCLAIMER

Please Note: The information and statements herein are believed to be reliable but are not to be construed as a warranty or representation for which PG Bison assumes responsibility, legal or otherwise. Users should undertake sufficient verification and testing to determine the suitability for their own particular purpose of any information or products referred to herein. No warranty of fitness for a particular purpose is made. Nothing herein is to be taken as permission, inducement or recommendation to practice any patented invention without a licence.

Whilst every care is taken to ensure the colour samples you see here are as close as possible to the real thing, please be aware there may still be slight differences between the colour in the brochure and the actual product due to the brochure production process. Before making your final decision, please be sure that you're 100% happy with the colour and finish you have chosen by asking to see a larger piece of the actual product. **PG Bison cannot be held responsible for any difference in the colours represented here to that of the actual product.**

CUSTOMER SERVICE CENTRE 0860 579
196

JOHANNESBURG 011 897 5200

CAPE TOWN 087 357 7989

DURBAN 087 350 0874

EXPORTS 011 897 5200



[pgbison.co.za](https://www.pgbison.co.za)

